


C-SSAI STEP DRILL WITH SPIRAL FLUTE AND HEX SHANK 六角柄螺旋槽台阶钻

- 优质高速钢
- CNC磨削, 出色的刃口质量
- 可PVD涂层, 升级性能
- 可按客户要求定制规格组合

- High quality HSS
- CNC grinding, excellent edge quality
- PVD coating is available, can improve performance
- Various specifications can be customized according to customer requirements

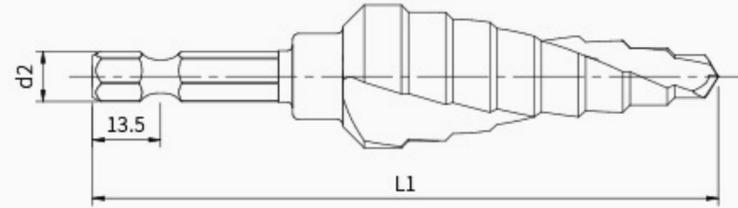

单位(Unit): mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSAI-503	6, 8, 10, 12, 14, 16, 18	6.35	80

最大切深深度 5 mm Maximum cutting depth 5 mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSAI-104	4, 5, 6, 7, 8, 9, 10, 11, 12	6.35	80

最大切深深度 4 mm Maximum cutting depth 4 mm




C-SSAS

STEP DRILL WITH SPIRAL FLUTE AND TRIANGLE SHANK 三角柄螺旋槽台阶钻

- 优质高速钢
- CNC磨削, 出色的刃口质量
- 可PVD涂层, 升级性能
- 可按客户要求定制规格组合

- High quality HSS
- CNC grinding, excellent edge quality
- PVD coating is available, can improve performance
- Various specifications can be customized according to customer requirements

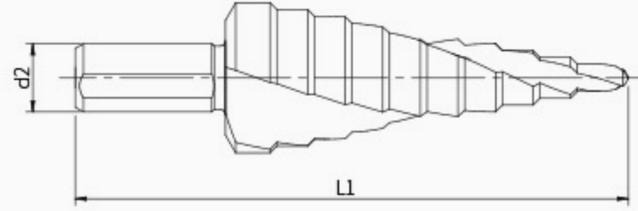


单位(Unit): mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSAS-101	4, 6, 8, 10, 12	8	65
C-SSAS-111	10			


最大切深深度 7 mm Maximum cutting depth 7 mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSAS-113	6, 8, 10, 12, 14, 16, 18	10	68

最大切深深度 5 mm Maximum cutting depth 5 mm

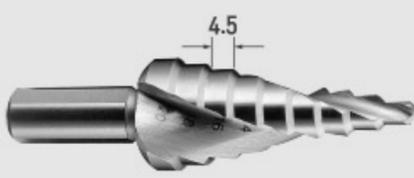	型号 MODEL	规格 SIZE	d2	L1
	C-SSAS-102	4, 5, 6, 7, 8, 9, 10, 11, 12	8	65
	C-SSAS-112		10	67
C-SSAS-103	4, 6, 8, 10, 12, 14, 16, 18, 20	10	75	

最大切深深度 4.5 mm Maximum cutting depth 4.5 mm

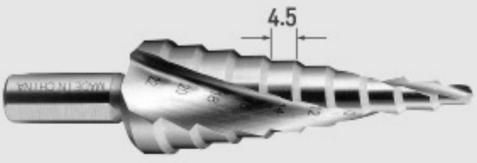
	型号 MODEL	规格 SIZE	d2	L1
	C-SSAS-114	4, 6, 8, 10, 12, 14, 16, 18, 20, 22	10	81

最大切深深度 4.5 mm Maximum cutting depth 4.5 mm




C-SSAS STEP DRILL WITH SPIRAL FLUTE AND TRIANGLE SHANK 三角柄螺旋槽台阶钻


- 优质高速钢
- CNC磨削, 出色的刃口质量
- 可PVD涂层, 升级性能
- 可按客户要求定制规格组合
- High quality HSS
- CNC grinding, excellent edge quality
- PVD coating is available, can improve performance
- Various specifications can be customized according to customer requirements

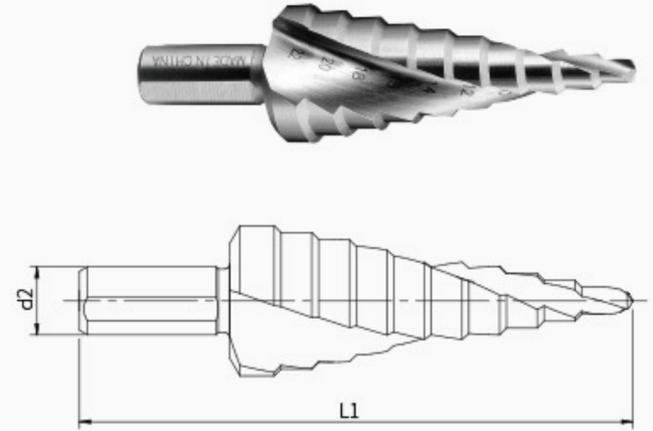

单位(Unit): mm

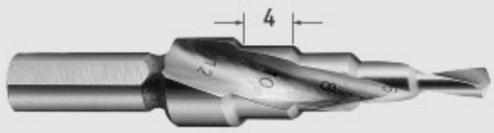	型号 MODEL	规格 SIZE	d2	L1
	C-SSAS-110	5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25	10	85
C-SSAS-135	6.5, 8.5, 10.5, 12.5, 16.5, 20.5, 25.5, 29, 32.5, 36.5, 40.5	10	96	


最大切深深度 4 mm Maximum cutting depth 4 mm

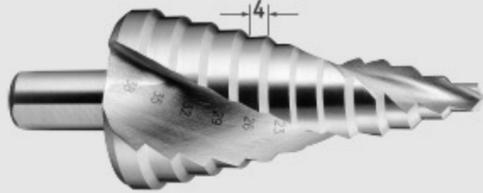	型号 MODEL	规格 SIZE	d2	L1
	C-SSAS-104	6, 9, 13, 16, 19, 21, 23, 26, 29, 32, 35, 38	13	100
C-SSAS-136	6, 11, 17, 23, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40	13	100	

最大切深深度 4 mm Maximum cutting depth 4 mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSAS-105	6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30	13	98
C-SSAS-115	5, 7.5, 10, 13, 16, 19, 21, 23, 26, 29, 31, 33, 35	10	104	

最大切深深度 4.5 mm Maximum cutting depth 4.5 mm

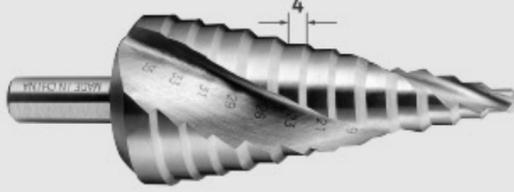
	型号 MODEL	规格 SIZE	d2	L1
	C-SSAS-137	9, 12, 15, 18, 21, 24, 27, 30, 33, 36	12	86

最大切深深度 4 mm Maximum cutting depth 4 mm



C-SSHI STEP DRILL WITH STRAIGHT FLUTE AND HEX SHANK 六角柄直槽台阶钻

- 优质高速钢
- CNC磨削, 出色的刃口质量
- 可PVD涂层, 升级性能
- 可按客户要求定制规格组合
- High quality HSS
- CNC grinding, excellent edge quality
- PVD coating is available, can improve performance
- Various specifications can be customized according to customer requirements

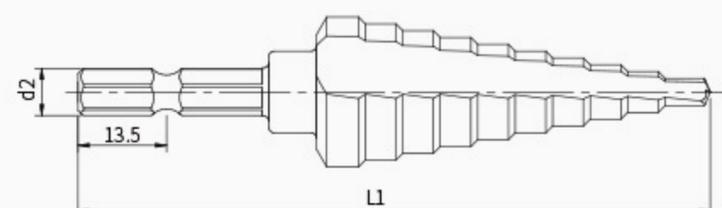

单位(Unit): mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSHI-102	4, 6, 8, 10, 12	6.35	78

最大切深深度 7 mm Maximum cutting depth 7 mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSHI-103	6, 8, 10, 12, 14, 16, 18	6.35	80

最大切深深度 5 mm Maximum cutting depth 5 mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSHI-101	4, 6, 8, 10, 12, 14, 16, 18, 20, 22	6.35	93

最大切深深度 4.5 mm Maximum cutting depth 4.5 mm

	型号 MODEL	规格 SIZE	d2	L1
	SSHI-501	4, 6, 8, 10, 12, 14, 16, 18, 20, 22	6.35	93

最大切深深度 4.5 mm Maximum cutting depth 4.5 mm




C-SSHS

STEP DRILL WITH STRAIGHT FLUTE AND TRIANGLE SHANK 三角柄直槽台阶钻

- 优质高速钢
- CNC磨削, 出色的刃口质量
- 可PVD涂层, 升级性能
- 可按客户要求定制规格组合

- High quality HSS
- CNC grinding, excellent edge quality
- PVD coating is available, can improve performance
- Various specifications can be customized according to customer requirements

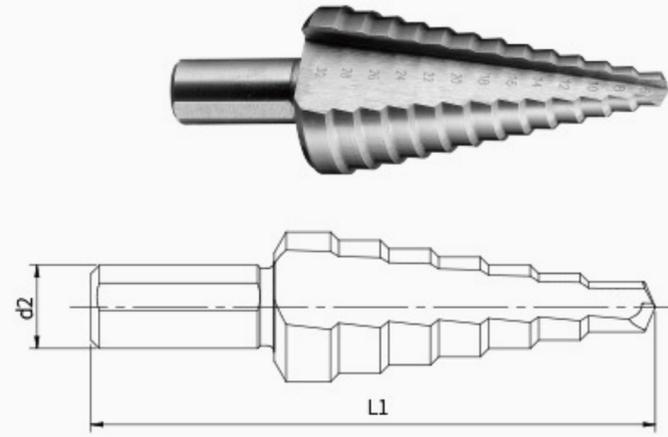

单位(Unit): mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSHS-101	4, 6, 8, 10, 12	6	65
	C-SSHS-109		10	
	C-SSHS-120		10	50

最大切深深度 7 mm Maximum cutting depth 7 mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSHS-111	6, 8, 10, 12, 14, 16, 18	10	68

最大切深深度 5 mm Maximum cutting depth 5 mm


	型号 MODEL	规格 SIZE	d2	L1
	C-SSHS-102	4, 5, 6, 7, 8, 9, 10, 11, 12	6	65
	C-SSHS-110		10	67
	C-SSHS-114		10	75
	C-SSHS-103	4, 6, 8, 10, 12, 14, 16, 18, 20	8	75
	C-SSHS-115		10	75
	C-SSHS-121		12	69

最大切深深度 4 mm Maximum cutting depth 4 mm



C-SSHS STEP DRILL WITH STRAIGHT FLUTE AND TRIANGLE SHANK 三角柄直槽台阶钻

- 优质高速钢
- CNC磨削, 出色的刃口质量
- 可PVD涂层, 升级性能
- 可按客户要求定制规格组合
- High quality HSS
- CNC grinding, excellent edge quality
- PVD coating is available, can improve performance
- Various specifications can be customized according to customer requirements

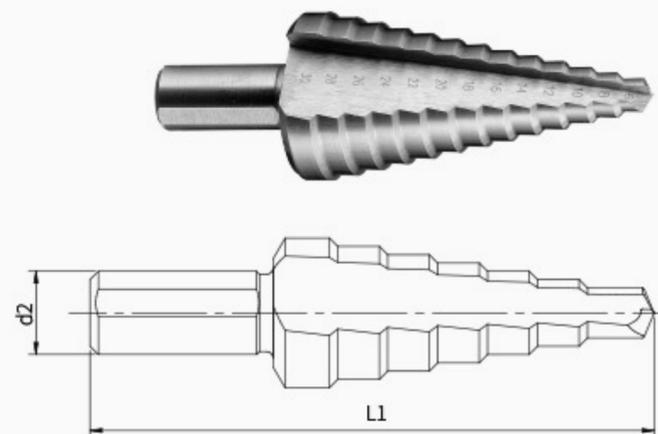

单位(Unit): mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSHS-112	4, 6, 8, 10, 12, 14, 16, 18, 20, 22	10	81

最大切深深度 4.5 mm Maximum cutting depth 4.5 mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSHS-104	6, 9, 13, 16, 19, 21, 23, 26, 29, 32, 35, 38	10	100
	C-SSHS-123		12	88.5

最大切深深度 5 mm Maximum cutting depth 5 mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSHS-140	4, 6, 8, 10, 12, 15, 18, 21, 24, 27, 30, 33, 36, 39	10	107

最大切深深度 4 mm Maximum cutting depth 4 mm

	型号 MODEL	规格 SIZE	d2	L1
	C-SSHS-113	5, 7.5, 10, 13, 16, 19, 21, 23, 26, 29, 31, 33, 35	10	104
	C-SSHS-105		13	98
	C-SSHS-116	6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30	10	96
	C-SSHS-122		12	90
	C-SSHS-141	5, 8.8, 11.8, 15.3, 19, 24.5, 28	10	69
	C-SSHS-142	6, 9, 12.7, 15.2, 18.6, 20.4, 22.5, 25.5, 28.3, 30.5	10	100
	C-SSHS-143	4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30	10	100
	C-SSHS-144	6, 9, 12, 16, 20, 22.5, 25, 28.5, 32	10	100


最大切深深度 4 mm Maximum cutting depth 4 mm



I-SSHS STEP DRILL WITH STRAIGHT FLUTE AND TRIANGLE SHANK (IMPERIAL)

三角柄直槽台阶钻(英制)


- 优质高速钢, 精细热处理, 硬度HRC63.5~HRC65.5
- CNC磨削, 出色的刃口质量
- 大圆弧槽型兼顾强度与锋利
- 可PVD涂层, 升级性能
- 可按客户要求定制各种规格组合
- High quality HSS, fine heat treatment, hardness HRC63.5~HRC64.5
- CNC grinding, excellent edge quality
- The design of large arc flute ensures strength and sharpness
- PVD coating is available, can improve performance
- Various specifications can be customized according to customer requirements

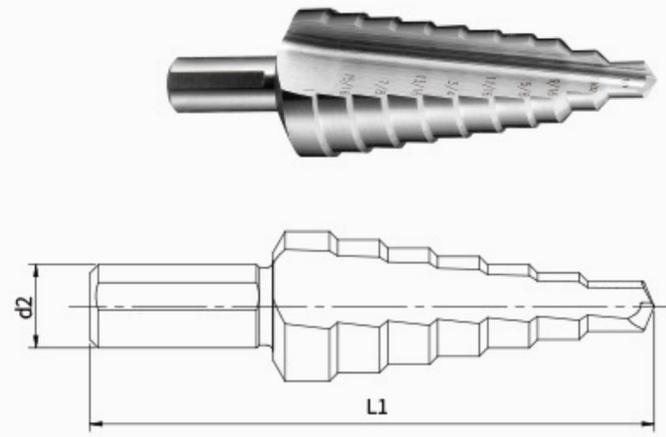

单位(Unit): inch

	型号 MODEL	规格 SIZE	d2	L1
	I-SSHS-101	3/16", 1/4", 5/16", 3/8", 7/16", 1/2"	1/4"	3-1/8"


最大切深深度 8 mm Maximum cutting depth 8 mm

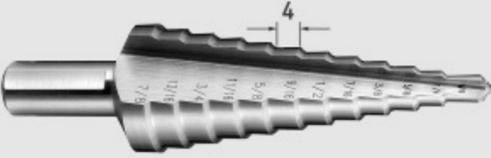	型号 MODEL	规格 SIZE	d2	L1
	I-SSHS-125	1/8", 5/32", 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 13/32", 7/16", 15/32", 1/2"	1/4"	3-1/8"

最大切深深度 4 mm Maximum cutting depth 4 mm

	型号 MODEL	规格 SIZE	d2	L1
	I-SSHS-102	1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4"	3/8"	2-3/4"

最大切深深度 4 mm Maximum cutting depth 4 mm

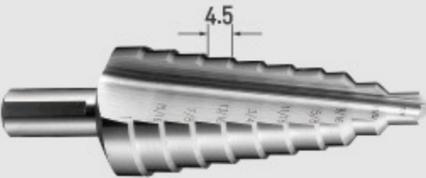	型号 MODEL	规格 SIZE	d2	L1
	I-SSHS-103	1/4", 13/32", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1"	3/8"	3-1/4"

最大切深深度 4.5 mm Maximum cutting depth 4.5 mm

	型号 MODEL	规格 SIZE	d2	L1
	I-SSHS-104	1/4", 25/64", 35/64", 11/16", 13/16", 7/8", 1", 1-1/8", 1-7/32", 1-1/4", 1-3/8"	3/8"	3-1/4"

最大切深深度 3.5 mm Maximum cutting depth 3.5 mm

	型号 MODEL	规格 SIZE	d2	L1
	I-SSHS-105	3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8"	3/8"	3-1/4"


最大切深深度 4 mm Maximum cutting depth 4 mm




SSAS STEP DRILL WITH SPIRAL FLUTE AND TRIANGLE SHANK (3 EDGE) 三角柄螺旋槽台阶钻(3刃)

- 优质高速钢
- CNC磨削, 出色的刃口质量
- 可PVD涂层, 升级性能
- 可按客户要求定制规格组合

- High quality HSS
- CNC grinding, excellent edge quality
- PVD coating is available, can improve performance
- Various specifications can be customized according to customer requirements

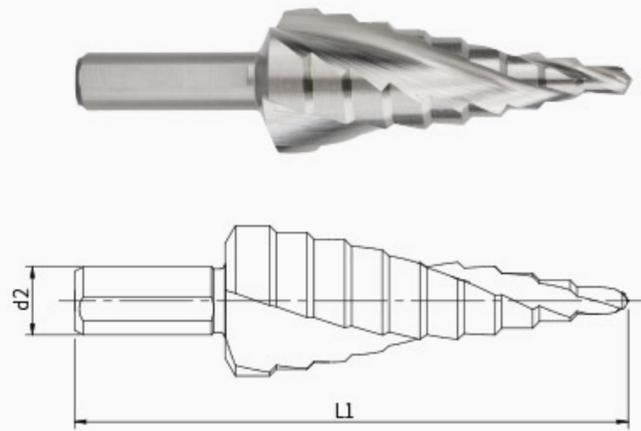

单位(Unit): mm

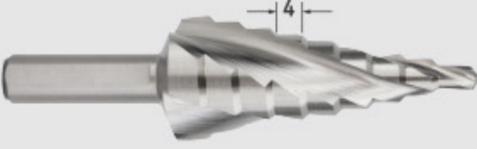
	型号 MODEL	规格 SIZE	d2	L1
	SSAS-501	4, 5, 6, 7, 8, 9, 10, 11, 12	6	65
SSAS-503	4, 6, 8, 10, 12, 14, 16, 18, 20	8	75	
SSAS-509	4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30	10	100	

最大切深深度 4 mm Maximum cutting depth 4 mm



SSHS STEP DRILL WITH STRAIGHT FLUTE AND TRIANGLE SHANK 三角柄直槽台阶钻

- 超硬高速钢, 精细热处理, 硬度HRC65~HRC67
- CNC磨削, 出色的刃口质量
- 大圆弧槽型兼顾强度与锋利
- 可PVD涂层, 升级性能
- 可按客户要求定制各种规格组合
- High quality HSS, fine heat treatment, hardness HRCHRC65~HRC66
- CNC grinding, excellent edge quality
- The design of large arc flute ensures strength and sharpness
- PVD coating is available, can improve performance
- Various specifications can be customized according to customer requirements

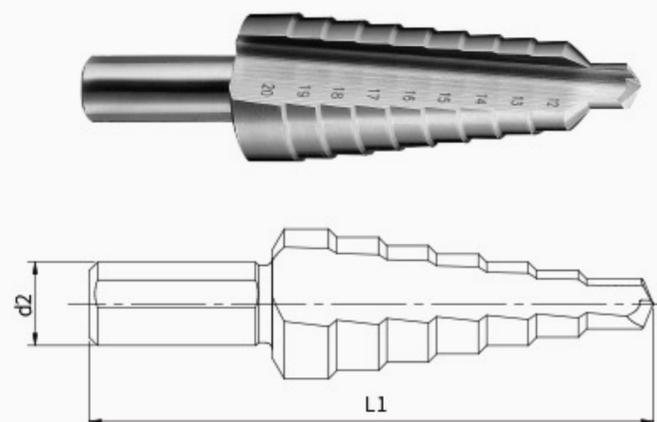

单位(Unit): mm

型号 MODEL	规格 SIZE	d2	L1
SSHS-132	12, 13, 14, 15, 16, 17, 18, 19, 20	9	75

最大切深深度 4 mm Maximum cutting depth 4 mm

型号 MODEL	规格 SIZE	d2	L1
SSHS-133	20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30	12	88

最大切深深度 4 mm Maximum cutting depth 4 mm

型号 MODEL	规格 SIZE	d2	L1
SSHS-134	30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40	13	97

最大切深深度 4 mm Maximum cutting depth 4 mm

型号 MODEL	规格 SIZE	d2	L1
SSHS-135	40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50	13	112

最大切深深度 4 mm Maximum cutting depth 4 mm

型号 MODEL	规格 SIZE	d2	L1
SSHS-136	50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60	13	120

最大切深深度 4 mm Maximum cutting depth 4 mm

