


DX-35 MAGNETIC DRILLING MACHINE

磁座钻机

- 重量轻, 操作便捷, 应用广泛
- 高功率, 高效钻孔
- 专利结构, 高精度制造工艺, 使用寿命长
- Light and convenient operation, widely used.
- High power and drilling efficiency.
- Patented structure, high-precision manufacturing process with long service life.

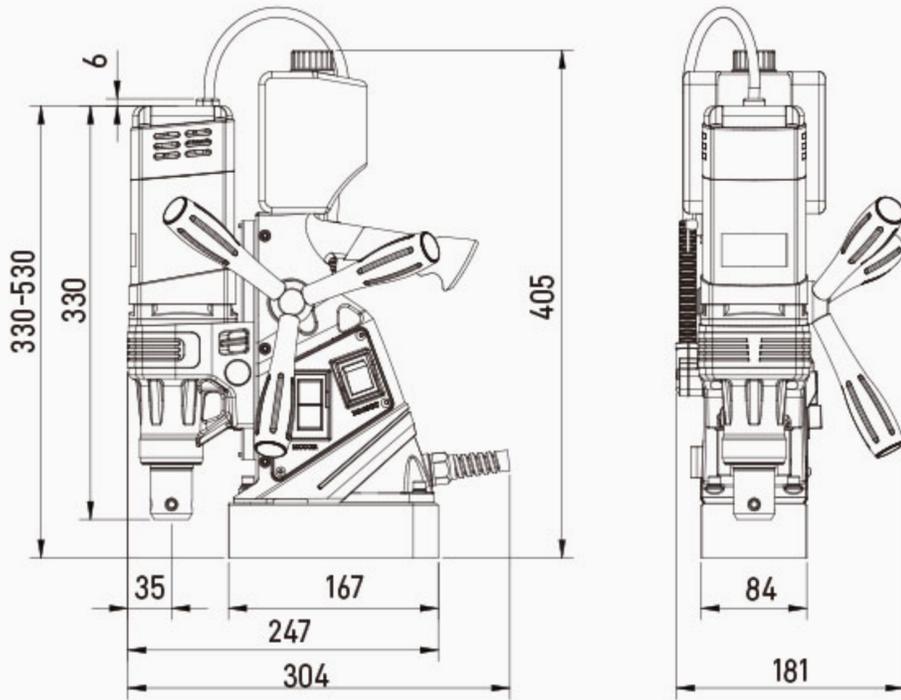

AC220V~240V 50~60HZ

额定输入功率 RATED INPUT POWER	1100W	钢板钻钻孔直径 THE DIAMETER RANGE OF ANNULAR CUTTER	≤φ35mm	磁座半吸 MAGNETIC BASE SEMI-SUCTION	✓
磁座吸力 MAGNETIC SUCTION	10000N	钢板钻钻孔深度 THE DRILLING DEPTH RANGE OF ANNULAR CUTTER	≤50mm		
行程 STROKE	120mm	麻花钻直径 THE DIAMETER RANGE OF TWIST DRILL	≤φ13mm		
主轴可调高度 MAINSHAFT ADJUSTABLE HEIGHT	95mm	攻丝规格 TAPPING SPECIFICATIONS	—		
主轴接口类型 SPINDLE INTERFACE TYPE	φ19.05mm	重量 WEIGHT	10.5KG		
磁座尺寸 MAGNETIC BASE SIZE	167*84*44mm	额定转速 RATED SPEED	450rpm		
外形尺寸 MACHINE SIZE	304*181*330(530)mm				
最小钢板厚度 THE MIN PROCESSING THICKNESS	10mm				

主要配件: 冷却壶 / 扳手 / 安全带等。MAIN ACCESSORIES: COOLING POT / WRENCH / SAFETY STRAP, ETC.

AC 110V~127V, 同款机型可选电压
50~60HZ SAME MODEL SELECTABLE VOLTAGE.

可选电源插头类型 OPTIONAL POWER PLUG TYPE

AC 220~240V				AC 110~127V		
英标插头 ENGLAND STANDARD PLUG	澳标插头 AUSTRALIA STANDARD PLUG	欧标插头 EUROP STANDARD PLUG	国标插头 CHINA STANDARD PLUG	工业插头 INDUSTRIAL PLUG	美标插头 AMERICA STANDARD PLUG	工业插头 INDUSTRIAL PLUG




DX-60S MAGNETIC DRILLING MACHINE

磁座钻机

- 自动进给
- 大功率, 强吸力, 高效钻孔
- MT3主轴, 高刚性, 高可靠性
- 专利结构, 高精度制造工艺, 使用寿命长
- Automatic feed
- High power, strong suction, efficient drilling
- MT3 spindle, high rigidity and reliability
- Patented structure, high-precision manufacturing process with long service life

AUTOMATIC FEED
自动进给款

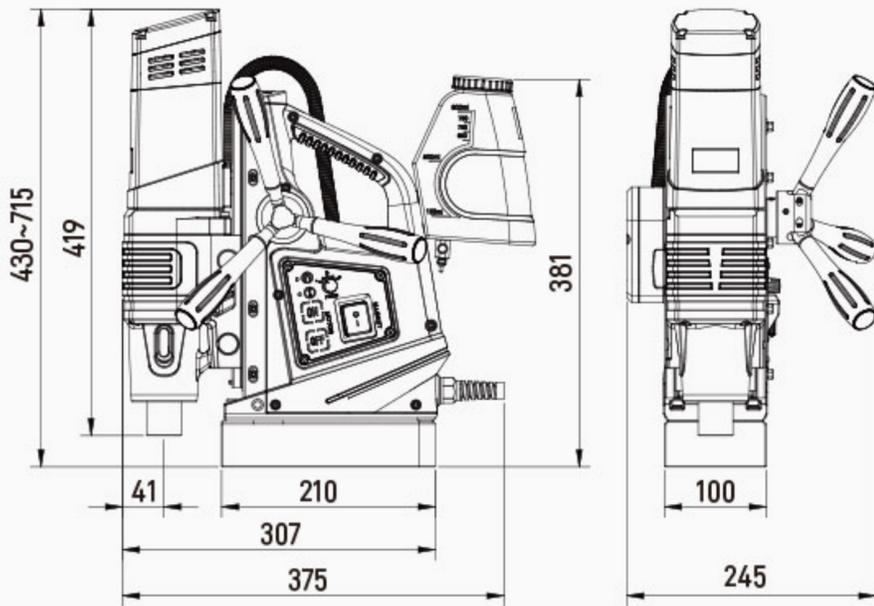

AC220V~240V 50~60HZ

额定输入功率 RATED INPUT POWER	1500W	钢板钻钻孔深度 THE DRILLING DEPTH RANGE OF ANNULAR CUTTER	≤75mm	磁座半吸 MAGNETIC BASE SEMI-SUCTION	✓
磁座吸力 MAGNETIC SUCTION	15000N	麻花钻直径 THE DIAMETER RANGE OF TWIST DRILL	≤ø31.5mm	吸力指示 SUCTION FORCE INDICATION	✓
行程 STROKE	170mm	攻丝规格 TAPPING SPECIFICATIONS	—	电机缓启动 MOTOR SLOW START	✓
电机可调范围 MAINSHAFT ADJUSTABLE HEIGHT	130mm	重量 WEIGHT	19.5KG	主电机过流保护 MAIN MOTOR CURRENT PROTECTION	✓
主轴接口类型 SPINDLE INTERFACE TYPE	MT3	额定转速 RATED SPEED	250/450rpm	齿轮换挡 GEAR SHIFT	✓
磁座尺寸 MAGNETIC BASE SIZE	210*100*45mm			齿轮过扭保护 GEAR OVER-TORSION PROTECTION	✓
外形尺寸 MACHINE SIZE	375*230*430(715)mm			自动进给 AUTOMATIC FEED	✓
最小钢板厚度 THE MIN PROCESSING THICKNESS	10mm			进给电子调速 FEED ELECTRONIC SPEED CONTROL	✓
钢板钻钻孔直径* THE DIAMETER RANGE OF ANNULAR CUTTER*	≤ø60mm			进给过流保护 FEEDING OVERCURRENT PROTECTION	✓

**TCT系列≤60mm, HSS系列≤50mm **TCT SERIES≤60mm, HSS SERIES≤50mm

主要配件: 冷却壶 / 扳手 / 斜铁块 / 安全带 / MT3夹具。 MAIN ACCESSORIES: COOLING POT / WRENCH / INCLINED IRON BOLCK / SAFETY STRAP / MT3 TOOL HOLDER.

AC 110V~127V, 同款机型可选电压
50~60HZ SAME MODEL SELECTABLE VOLTAGE.

可选电源插头类型 OPTIONAL POWER PLUG TYPE


AC 220~240V					AC 110~127V	
英标插头 ENGLAND STANDARD PLUG	澳标插头 AUSTRALIA STANDARD PLUG	欧标插头 EUROP STANDARD PLUG	国标插头 CHINA STANDARD PLUG	工业插头 INDUSTRIAL PLUG	美标插头 AMERICA STANDARD PLUG	工业插头 INDUSTRIAL PLUG



DX-60X MAGNETIC DRILLING MACHINE

磁座钻机

- 正反转调速功能
- 大功率, 强吸力, 高效钻孔
- MT3主轴, 高刚性, 高可靠性
- 专利结构, 高精度制造工艺, 使用寿命长
- Tapping
- High power, strong suction, efficient drilling
- MT3 spindle, high rigidity and reliability
- Patented structure, high-precision manufacturing process with long service life

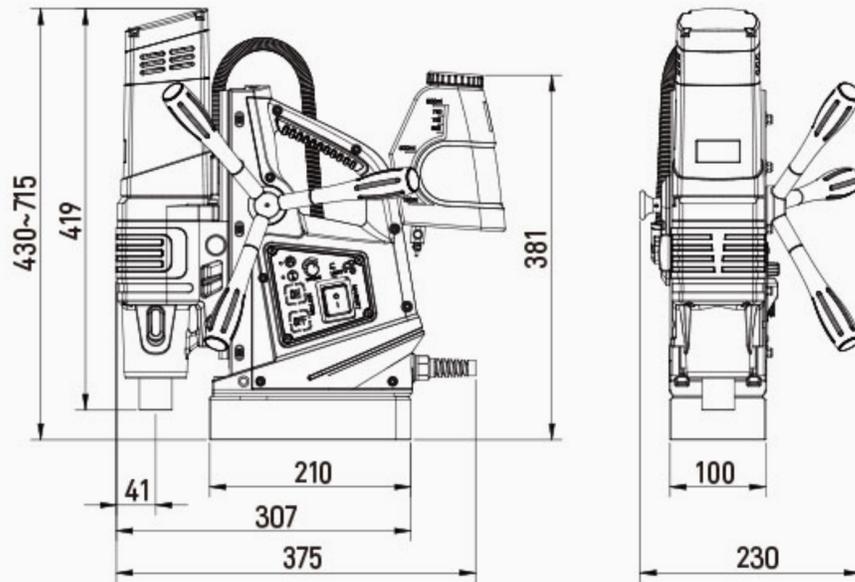

AC220V~240V 50~60HZ

额定输入功率 RATED INPUT POWER	1500W	钢板钻钻孔深度 THE DRILLING DEPTH RANGE OF ANNULAR CUTTER	≤75mm	磁座半吸 MAGNETIC BASE SEMI-SUCTION	✓
磁座吸力 MAGNETIC SUCTION	15000N	麻花钻直径 THE DIAMETER RANGE OF TWIST DRILL	≤ø31.5mm	吸力指示 SUCTION FORCE INDICATION	✓
行程 STROKE	170mm	攻丝规格 TAPPING SPECIFICATIONS	≤M16	电机缓启动 MOTOR SLOW START	✓
主轴可调高度 MAINSHAFT ADJUSTABLE HEIGHT	130mm	重量 WEIGHT	19KG	主电机过流保护 MAIN MOTOR CURRENT PROTECTION	✓
主轴接口类型 SPINDLE INTERFACE TYPE	MT3	额定转速 RATED SPEED	250/450rpm	滑板锁止 SLIDING PLATE LOCKING	✓
磁座尺寸 MAGNETIC BASE SIZE	210*100*45mm			齿轮换挡 GEAR SHIFT	✓
外形尺寸 MACHINE SIZE	375*230*430(715)mm			齿轮过扭保护 GEAR OVER-TORSION PROTECTION	✓
最小钢板厚度 THE MIN PROCESSING THICKNESS	10mm			电机正反转 MOTOR FORWARD AND REVERSE ROTATION	✓
钢板钻钻孔直径* THE DIAMETER RANGE OF ANNULAR CUTTER*	≤ø60mm			主电机电子调速 MAIN MOTOR ELECTRONIC SPEED CONTROL	✓

TCT系列≤60mm, HSS系列≤50mm *TCT SERIES≤60mm, HSS SERIES≤50mm

主要配件: 冷却壶 / 扳手 / 斜铁块 / 安全带 / MT3夹具。 MAIN ACCESSORIES: COOLING POT / WRENCH / INCLINED IRON BOLCK / SAFETY STRAP / MT3 TOOL HOLDER.

AC 110V~127V, 同款机型可选电压 50~60HZ SAME MODEL SELECTABLE VOLTAGE.


可选电源插头类型 OPTIONAL POWER PLUG TYPE

AC 220~240V					AC 110~127V	
英标插头 ENGLAND STANDARD PLUG	澳标插头 AUSTRALIA STANDARD PLUG	欧标插头 EUROP STANDARD PLUG	国标插头 CHINA STANDARD PLUG	工业插头 INDUSTRIAL PLUG	美标插头 AMERICA STANDARD PLUG	工业插头 INDUSTRIAL PLUG



DX-60 MAGNETIC DRILLING MACHINE 磁座钻机

- 大功率, 强吸力, 高效钻孔
- MT3主轴, 高刚性, 高可靠性
- 专利结构, 高精度制造工艺, 使用寿命长
- High power, strong suction, efficient drilling
- MT3 spindle, high rigidity and reliability
- Patented structure, high-precision manufacturing process with long service life

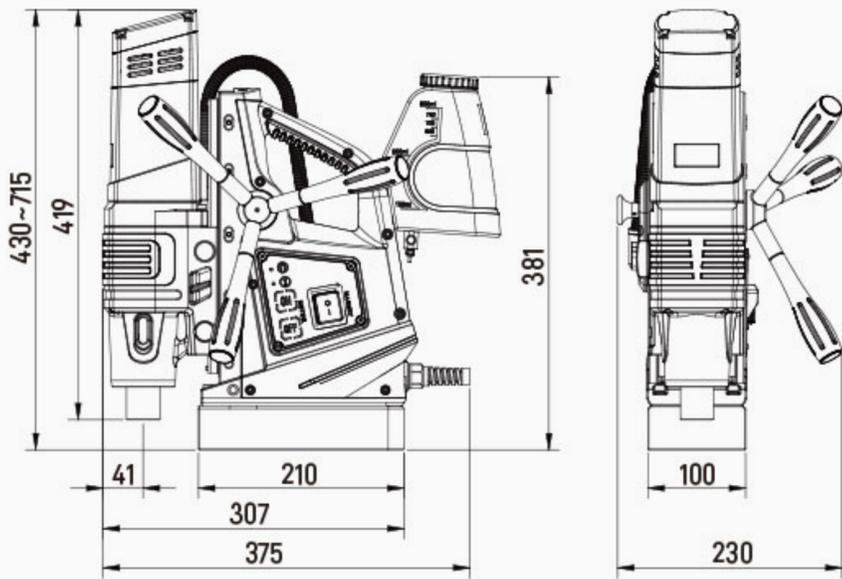

AC220V~240V 50~60HZ

额定输入功率 RATED INPUT POWER	1500W	钢板钻钻孔深度 THE DRILLING DEPTH RANGE OF ANNULAR CUTTER	≤75mm	磁座半吸 MAGNETIC BASE SEMI-SUCTION	✓
磁座吸力 MAGNETIC SUCTION	15000N	麻花钻直径 THE DIAMETER RANGE OF TWIST DRILL	≤ø31.5mm	吸力指示 SUCTION FORCE INDICATION	✓
行程 STROKE	170mm	攻丝规格 TAPPING SPECIFICATIONS	—	电机缓启动 MOTOR SLOW START	✓
电机可调范围 MAINSHAFT ADJUSTABLE HEIGHT	130mm	重量 WEIGHT	19KG	主电机过流保护 MAIN MOTOR CURRENT PROTECTION	✓
主轴接口类型 SPINDLE INTERFACE TYPE	MT3	额定转速 RATED SPEED	250/450rpm	滑板锁止 SLIDING PLATE LOCKING	✓
磁座尺寸 MAGNETIC BASE SIZE	210*100*45mm			齿轮换挡 GEAR SHIFT	✓
外形尺寸 MACHINE SIZE	375*230*430(715)mm			齿轮过扭保护 GEAR OVER-TORSION PROTECTION	✓
最小钢板厚度 THE MIN PROCESSING THICKNESS	10mm				
钢板钻钻孔直径* THE DIAMETER RANGE OF ANNULAR CUTTER*	≤ø60mm				

**TCT系列≤60mm, HSS系列≤50mm **TCT SERIES≤60mm, HSS SERIES≤50mm

主要配件: 冷却壶 / 扳手 / 斜铁块 / 安全带 / MT3夹具。 MAIN ACCESSORIES: COOLING POT / WRENCH / INCLINED IRON BOLCK / SAFETY STRAP / MT3 TOOL HOLDER.

AC 110V~127V, 同款机型可选电压
50~60HZ SAME MODEL SELECTABLE VOLTAGE.

可选电源插头类型 OPTIONAL POWER PLUG TYPE


AC 220~240V					AC 110~127V	
英标插头 ENGLAND STANDARD PLUG	澳标插头 AUSTRALIA STANDARD PLUG	欧标插头 EUROP STANDARD PLUG	国标插头 CHINA STANDARD PLUG	工业插头 INDUSTRIAL PLUG	美标插头 AMERICA STANDARD PLUG	工业插头 INDUSTRIAL PLUG



DX-120X MAGNETIC DRILLING MACHINE

磁座钻机

- 正反转调速功能
- 大功率, 超强吸力, 高效钻孔
- MT4主轴, 高刚性, 高可靠性
- 专利结构, 高精度制造工艺, 使用寿命长
- Tapping
- High power, super suction, efficient drilling
- MT4 spindle, high rigidity and reliability
- Patented structure, high-precision manufacturing process with long service life

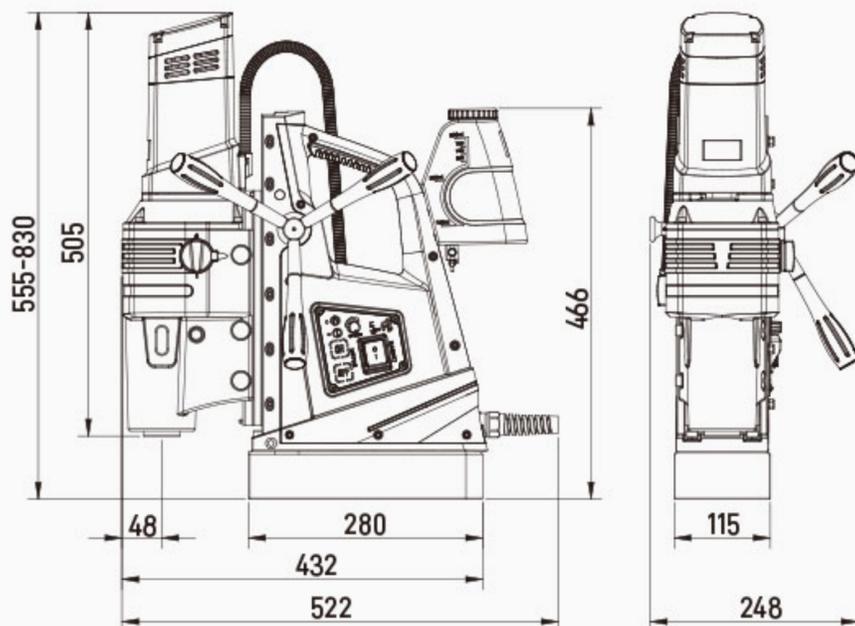

AC220V~240V 50~60HZ

额定输入功率 RATED INPUT POWER	2500W	钢板钻钻孔深度 THE DRILLING DEPTH RANGE OF ANNULAR CUTTER	≤100mm	磁座半吸 MAGNETIC BASE SEMI-SUCTION	✓
磁座吸力 MAGNETIC SUCTION	20000N	麻花钻直径 THE DIAMETER RANGE OF TWIST DRILL	≤φ42mm	吸力指示 SUCTION FORCE INDICATION	✓
行程 STROKE	220mm	攻丝规格 TAPPING SPECIFICATIONS	≤M33	电机缓启动 MOTOR SLOW START	✓
主轴可调高度 MAINSHAFT ADJUSTABLE HEIGHT	60mm	重量 WEIGHT	36.5KG	主电机过流保护 MAIN MOTOR CURRENT PROTECTION	✓
主轴接口类型 SPINDLE INTERFACE TYPE	MT4	额定转速 RATED SPEED	80/125/175/300rpm	滑板锁止 SLIDING PLATE LOCKING	✓
磁座尺寸 MAGNETIC BASE SIZE	280*115*56.5mm			齿轮换挡 GEAR SHIFT	✓
外形尺寸 MACHINE SIZE	522*248*555(830)mm			齿轮过扭保护 GEAR OVER-TORSION PROTECTION	✓
最小钢板厚度 THE MIN PROCESSING THICKNESS	15mm			电机正反转 MOTOR FORWARD AND REVERSE ROTATION	✓
钢板钻钻孔直径* THE DIAMETER RANGE OF ANNULAR CUTTER*	≤φ120mm			主电机电子调速 MAIN MOTOR ELECTRONIC SPEED CONTROL	✓

TCT系列≤120mm, HSS系列≤65mm *TCT SERIES≤120mm, HSS SERIES≤65mm

主要配件: 冷却壶 / 扳手 / 斜铁块 / 安全带 / MT4夹具。 MAIN ACCESSORIES: COOLING POT / WRENCH / INCLINED IRON BOLCK / SAFETY STRAP / MT4 TOOL HOLDER.


AC 110V~127V, 同款机型可选电压 50~60HZ SAME MODEL SELECTABLE VOLTAGE.

可选电源插头类型 OPTIONAL POWER PLUG TYPE

AC 220~240V					AC 110~127V	
英标插头 ENGLAND STANDARD PLUG	澳标插头 AUSTRALIA STANDARD PLUG	欧标插头 EUROP STANDARD PLUG	国标插头 CHINA STANDARD PLUG	工业插头 INDUSTRIAL PLUG	美标插头 AMERICA STANDARD PLUG	工业插头 INDUSTRIAL PLUG



- 大功率, 超强吸力, 高效钻孔
- MT4主轴, 高刚性, 高可靠性
- 专利结构, 高精度制造工艺, 使用寿命长
- High power, super suction, efficient drilling
- MT4 spindle, high rigidity and reliability
- Patented structure, high-precision manufacturing process with long service life

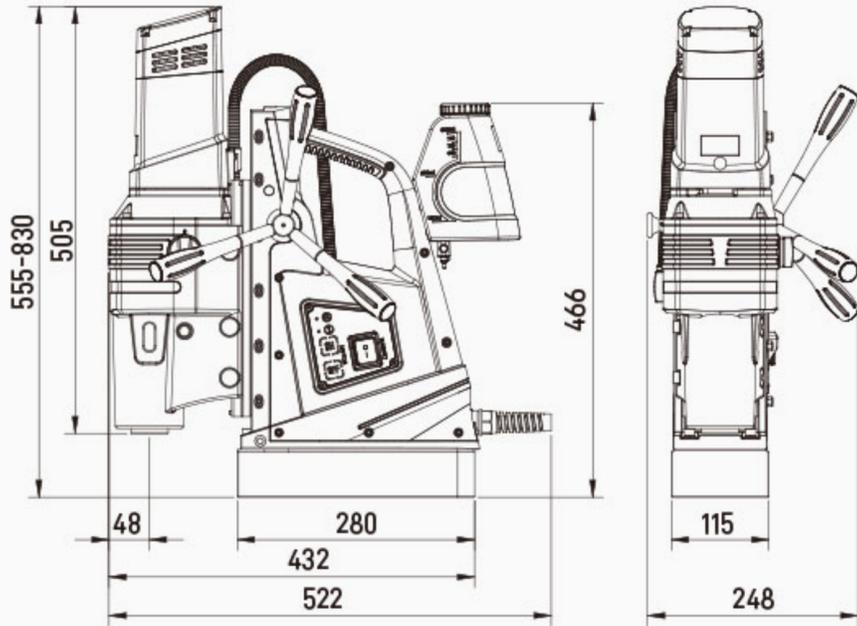

AC220V~240V 50~60HZ

额定输入功率 RATED INPUT POWER	2500W	钢板钻钻孔深度 THE DRILLING DEPTH RANGE OF ANNULAR CUTTER	≤100mm	磁座半吸 MAGNETIC BASE SEMI-SUCTION	✓
磁座吸力 MAGNETIC SUCTION	20000N	麻花钻直径 THE DIAMETER RANGE OF TWIST DRILL	≤ø42mm	吸力指示 SUCTION FORCE INDICATION	✓
行程 STROKE	220mm	攻丝规格 TAPPING SPECIFICATIONS	—	电机缓启动 MOTOR SLOW START	✓
电机可调范围 MAINSHAFT ADJUSTABLE HEIGHT	60mm	重量 WEIGHT	36.5KG	主电机过流保护 MAIN MOTOR CURRENT PROTECTION	✓
主轴接口类型 SPINDLE INTERFACE TYPE	MT4	额定转速 RATED SPEED	80/125/175/300rpm	滑板锁止 SLIDING PLATE LOCKING	✓
磁座尺寸 MAGNETIC BASE SIZE	280*115*56.5mm			齿轮换档 GEAR SHIFT	✓
外形尺寸 MACHINE SIZE	522*248*555(830)mm			齿轮过扭保护 GEAR OVER-TORSION PROTECTION	✓
最小钢板厚度 THE MIN PROCESSING THICKNESS	15mm				
钢板钻钻孔直径* THE DIAMETER RANGE OF ANNULAR CUTTER*	≤ø120mm				

***TCT系列≤120mm, HSS系列≤65mm ***TCT SERIES≤120mm, HSS SERIES≤65mm

主要配件: 冷却壶 / 扳手 / 斜铁块 / 安全带 / MT4夹具。 MAIN ACCESSORIES: COOLING POT / WRENCH / INCLINED IRON BOLCK / SAFETY STRAP / MT4 TOOL HOLDER.


可选电源插头类型 OPTIONAL POWER PLUG TYPE

AC 220~240V				
英标插头 ENGLAND STANDARD PLUG	澳标插头 AUSTRALIA STANDARD PLUG	欧标插头 EUROP STANDARD PLUG	国标插头 CHINA STANDARD PLUG	工业插头 INDUSTRIAL PLUG



- 卧式结构, 满足狭小空间
- 体积小, 操作灵活
- 大功率, 高效钻孔
- Horizontal structure, to meet the narrow space operation.
- Small size and flexible operation.
- High power and drilling efficiency.

AUTOMATIC FEED 自动进给款

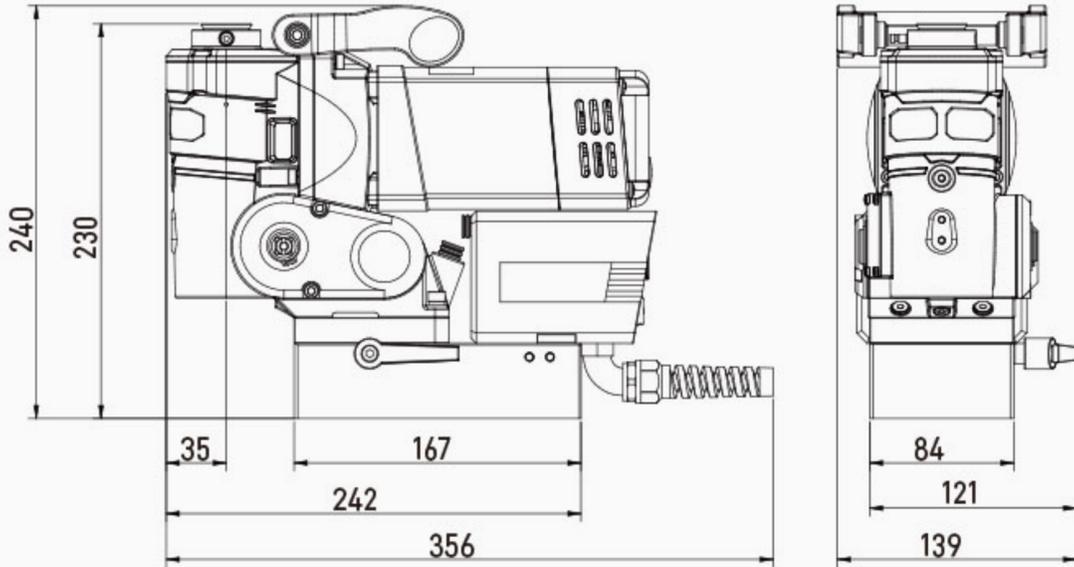

AC220V~240V 50~60HZ

额定输入功率 RATED INPUT POWER	1100W	钢板钻钻孔深度 THE DRILLING DEPTH RANGE OF ANNULAR CUTTER	≤50mm	磁座半吸 MAGNETIC BASE SEMI-SUCTION	✓
磁座吸力 MAGNETIC SUCTION	9000N	麻花钻直径 THE DIAMETER RANGE OF TWIST DRILL	≤φ13mm	主电机过流保护 MAIN MOTOR OVERCURRENT PROTECTION	✓
行程 STROKE	63mm	攻丝规格 TAPPING SPECIFICATIONS	—	自动进给 AUTOMATIC FEED	✓
主轴可调高度 MAINSHAFT ADJUSTABLE HEIGHT	—	重量 WEIGHT	11.8KG	进给过流保护 FEEDING OVERCURRENT PROTECTION	✓
主轴接口类型 SPINDLE INTERFACE TYPE	φ19.05mm	额定转速 RATED SPEED	450rpm	钻穿复位 DRILL THROUGH RESET	✓
磁座尺寸 MAGNETIC BASE SIZE	167*84*44mm			进给点动 FEED POINT MOVEMENT	✓
外形尺寸 MACHINE SIZE	356*139*240mm			机身微调 FUSELAGE FINE ADJUSTMENT	✓
最小钢板厚度 THE MIN PROCESSING THICKNESS	10mm			照明 ILLUMINATION	✓
钢板钻钻孔直径 THE DIAMETER RANGE OF ANNULAR CUTTER	≤φ35mm			激光定位 LASER POSITIONING	✓

主要配件: 冷却壶 / 扳手 / 安全带等。MAIN ACCESSORIES: COOLING POT / WRENCH / SAFETY STRAP, ETC.



AC 110V~127V, 同款机型可选电压 50~60HZ SAME MODEL SELECTABLE VOLTAGE.

可选电源插头类型 OPTIONAL POWER PLUG TYPE

AC 220~240V					AC 110~127V	
英标插头 ENGLAND STANDARD PLUG	澳标插头 AUSTRALIA STANDARD PLUG	欧标插头 EUROP STANDARD PLUG	国标插头 CHINA STANDARD PLUG	工业插头 INDUSTRIAL PLUG	美标插头 AMERICA STANDARD PLUG	工业插头 INDUSTRIAL PLUG



- 卧式结构, 满足狭小空间
- 体积小, 操作灵活
- 大功率, 高效钻孔
- Horizontal structure, to meet the narrow space operation.
- Small size and flexible operation.
- High power and drilling efficiency.

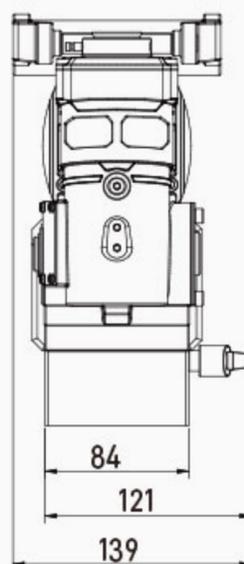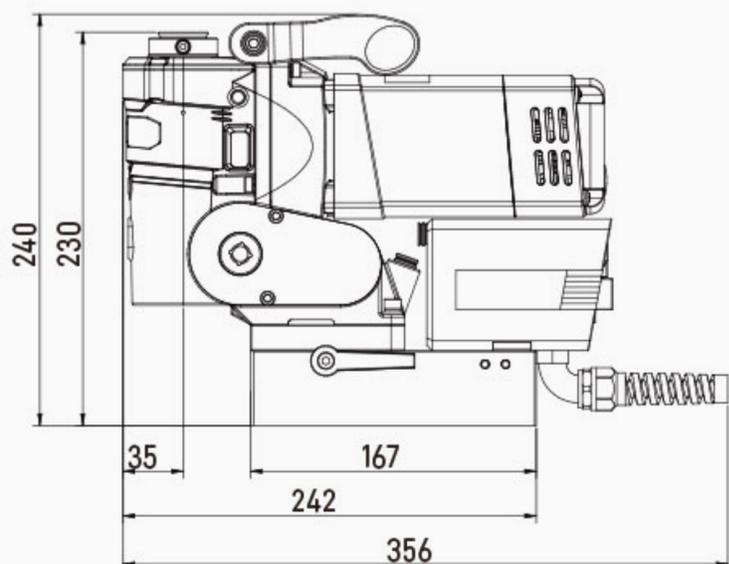

AC220V~240V 50~60HZ

额定输入功率 RATED INPUT POWER	1100W	钢板钻钻孔深度 THE DRILLING DEPTH RANGE OF ANNULAR CUTTER	≤50mm	磁座半吸 MAGNETIC BASE SEMI-SUCTION	✓
磁座吸力 MAGNETIC SUCTION	9000N	麻花钻直径 THE DIAMETER RANGE OF TWIST DRILL	≤φ13mm	机身微调 FUSELAGE FINE ADJUSTMENT	✓
行程 STROKE	63mm	攻丝规格 TAPPING SPECIFICATIONS	—		
主轴可调高度 MAINSHAFT ADJUSTABLE HEIGHT	—	重量 WEIGHT	11.5KG		
主轴接口类型 SPINDLE INTERFACE TYPE	φ19.05mm	额定转速 RATED SPEED	450rpm		
磁座尺寸 MAGNETIC BASE SIZE	167*84*44mm				
外形尺寸 MACHINE SIZE	356*139*240mm				
最小钢板厚度 THE MIN PROCESSING THICKNESS	10mm				
钢板钻钻孔直径 THE DIAMETER RANGE OF ANNULAR CUTTER	≤φ35mm				

主要配件: 冷却壶 / 扳手 / 安全带等。MAIN ACCESSORIES: COOLING POT / WRENCH / SAFETY STRAP, ETC.

AC 110V~127V, 同款机型可选电压
50~60HZ SAME MODEL SELECTABLE VOLTAGE.

可选电源插头类型 OPTIONAL POWER PLUG TYPE

AC 220~240V					AC 110~127V	
英标插头 ENGLAND STANDARD PLUG	澳标插头 AUSTRALIA STANDARD PLUG	欧标插头 EUROP STANDARD PLUG	国标插头 CHINA STANDARD PLUG	工业插头 INDUSTRIAL PLUG	美标插头 AMERICA STANDARD PLUG	工业插头 INDUSTRIAL PLUG

